


EVEREST

DARK GREY Y631435
Textured 30x60 / 11.8x23.6"

WALL & FLOOR COVERINGS



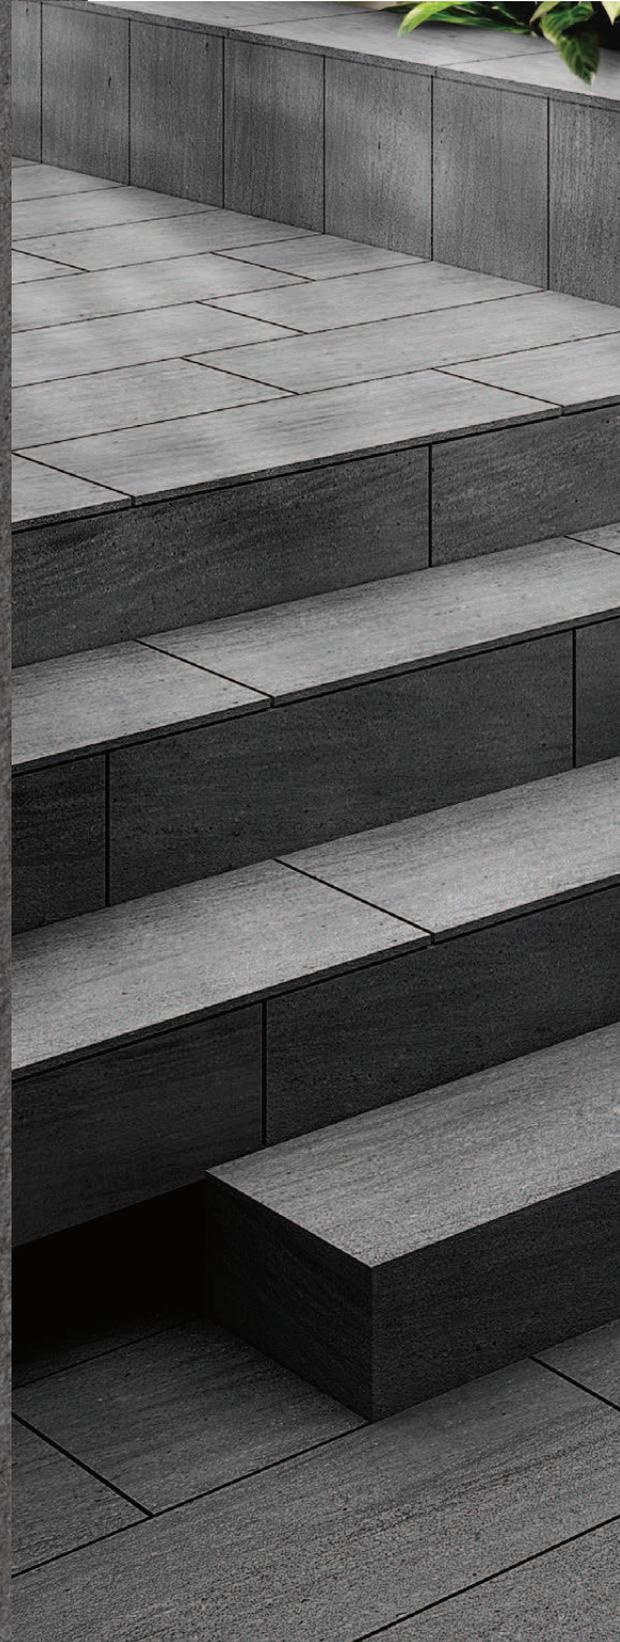

EVEREST

SIZE / FINISH

TEXTURED



Y631435 30x60 cm 11.8x23.6"

HE01 / HERRINGBONE 30x30 cm 11.8x11.8"



IVORY



DARK GREY



BEIGE



LIGHT GREY



GREY

MR03 / RANDOM 30x60 cm 11.8x23.6"



MIX1



MIX2



DARK GREY



BEIGE



LIGHT GREY



GREY

PACKING LIST

| | Pcs Per M ² | Pcs Per Box | Weight Per Box | Boxes Per PLT | Boxes Per EU PLT |
|---------------------|------------------------|-------------|----------------|---------------|------------------|
| 30x60 cm 11.8x23.6" | 5.56 | 7 | 27 | 40 | 36 |

COLOR

BEIGE



SD63002 30x60 cm 11.8x23.6"

LIGHT GREY



SD63003 30x60 cm 11.8x23.6"

GREY



SD63005 30x60 cm 11.8x23.6"

IVORY



Y631433 30x60 cm 11.8x23.6"

DARK GREY



Y631435 30x60 cm 11.8x23.6"

| | Water Absorption (%) | Dimension (mm) | | | | | | | |
|---------------------|----------------------|----------------|-------|-----------|-----------------------|-----------------|----------------|---------|----------------|
| | | Length | Width | Thickness | Straightness of Sides | Central Warpage | Edge Curvature | Warpage | Rectangularity |
| EN14411 (ISO 13006) | ≤ 0.5 | ± 2.0 | ± 2.0 | ± 0.5 | ± 1.5 | ± 2.0 | ± 2.0 | ± 2.0 | ± 2.0 |
| 30x60 cm 11.8x23.6" | ≤ 0.1 | ± 0.4 | ± 0.4 | ± 0.4 | ± 0.4 | +0.7~-0.3 | +0.3~-0.5 | ± 0.8 | ± 0.6 |

| | Breaking Strength Modulus of Rupture | Thermal Shock Resistance | Resistance to Chemical | Glazed Crack Resistance | Frost Resistance | Stains Resistance |
|---------------------|--------------------------------------|---------------------------------|------------------------|-------------------------|------------------|-------------------|
| | EN14411 (ISO 13006) | S≥1300N / R≥35N/mm ² | Test method available | Minimum GB | Resistant | Required |
| 30x60 cm 11.8x23.6" | S≥2000N / R≥38N/mm ² | Resistant | Minimum GLA | Resistant | Resistant | Minimum class 5 |