



2018 CATALOGUE

MARBLE MARVELOUS

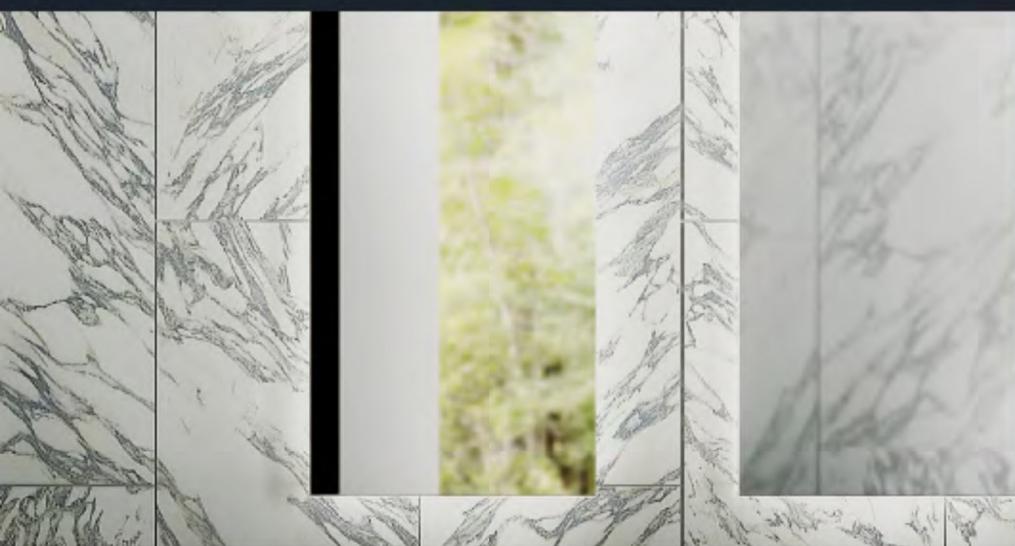

GREY A614393
Glazed Polished
60x120 / 23.6x47.2"

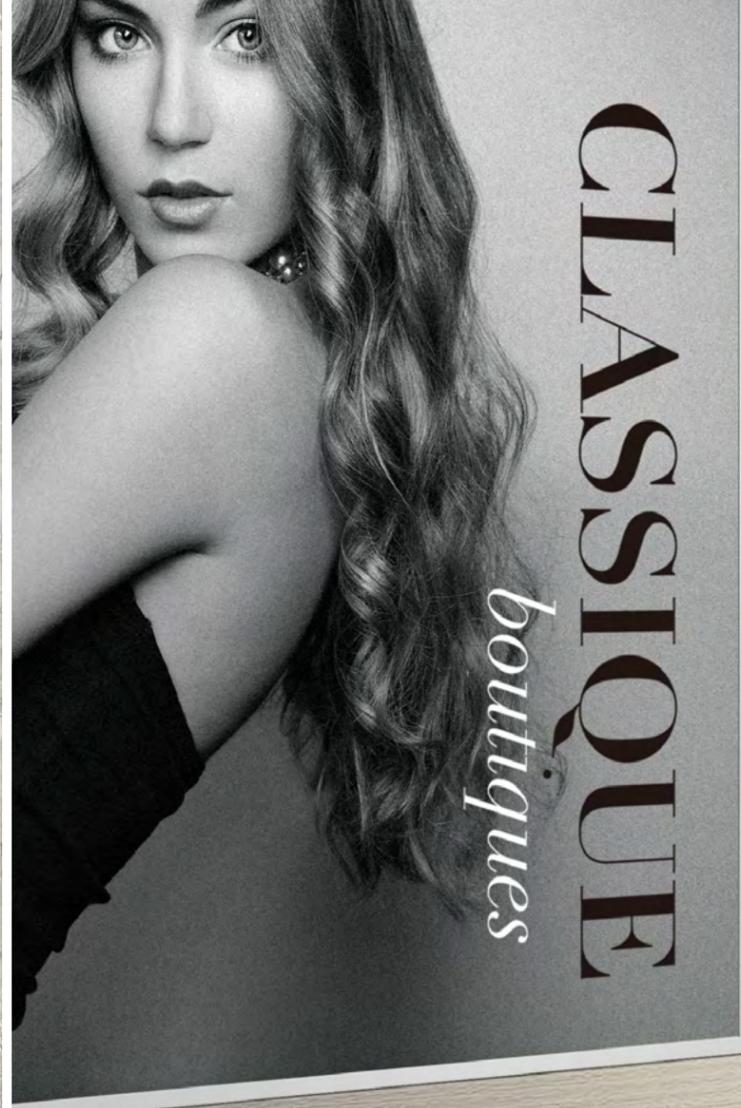

CLASSIQUE
boutiques



TRAVERTINO

GREY A614393
Glazed Polished
60x120 / 23.6x47.2"



TRAVERTINO

COLOR

SIZE / FINISH

IVORY

614370



60x120 cm 23.6x47.2"

BEIGE

614371



60x120 cm 23.6x47.2"

GREY

614393



60x120 cm 23.6x47.2"

TAN

614395



60x120 cm 23.6x47.2"

HONED / GLAZED POLISHED

60x120 cm
23.6x47.2"

NATURAL / FLAMED BRUSH

60x60 cm
23.6x23.6"

30x60 cm
11.8x23.6"

PACKING LIST

		Pcs Per M ²	Pcs Per Box	Weight Per Box	Boxes Per PLT	Boxes Per EU PLT
30x60 cm	11.8x23.6"	5.56	7	27	40	36
60x60 cm	23.6x23.6"	2.78	4	34	32	28
60x120 cm	23.6x47.2"	1.39	2	45	40	36



Dimension (mm)

	Water Absorption (%)	Length	Width	Thickness	Straightness of Sides	Central Warpage	Edge Curvature	Warpage	Rectangularity
EN14411 (ISO 13006)	≤ 0.5	± 2.0	± 2.0	± 0.5	± 1.5	± 2.0	± 2.0	± 2.0	± 2.0
30x60 cm 11.8x23.6"	≤ 0.1	± 0.4	± 0.4	± 0.4	± 0.4	+0.6~-0.3	+0.5~-0.4	± 0.8	± 0.6
60x60 cm 23.6x23.6"	≤ 0.1	± 0.4	± 0.4	± 0.4	± 0.4	+0.6~-0.3	+0.5~-0.4	± 1.0	± 0.6
60x120 cm 23.6x47.2"	≤ 0.1	± 0.5	± 0.5	± 0.4	± 0.4	+0.6~-0.4	+0.5~-0.5	± 1.0	± 1.0



	Breaking Strength Modulus of Rupture	Thermal Shock Resistance	Resistance to Chemical	Glazed Crack Resistance	Frost Resistance	Stain Resistance
EN14411 (ISO 13006)	S≥1300N / R≥35N/mm ²	Test method available	Minimum GB	Resistant	Resistant	Minimum class 3
30x60 cm 11.8x23.6"	S≥2000N / R≥38N/mm ²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5
60x60 cm 23.6x23.6"	S≥2200N / R≥38N/mm ²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5
60x120 cm 23.6x47.2"	S≥2600N / R≥40N/mm ²	Resistant	Minimum GLA	Resistant	Resistant	Minimum class 5



CHAMPION BUILDING MATERIALS CO., LTD.

No. 200-7, Zhugaocuo, Dapu Li 13 Ln, Zhunan Town, Miaoli Hsien, Taiwan, R.O.C.

+886 - 37- 583810

export@mail.champion.com.tw

www.champion-tile.com

